



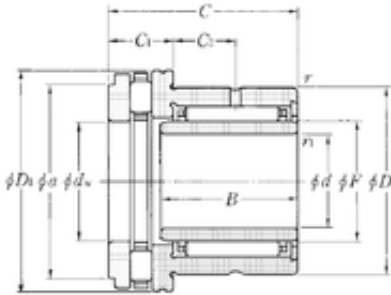

## NTN Bearing Driveshaft do Brasil

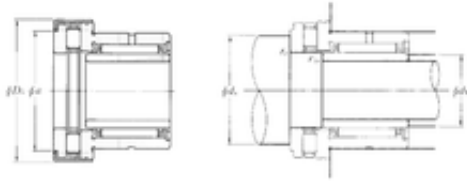

NKXR30T2Z+IR25 x 30 x 20 Bearing 2D drawings and 3D CAD models

25 mm x 42 mm x 20 mm 25 mm x 42 mm x 20 mm NTN NKXR30T2Z+IR25 x 30 x 20 complex bearings

Bearing No. NKXR30T2Z+IR25 x 30 x 20

|                                |          |
|--------------------------------|----------|
| Bore Diameter                  | 25 mm    |
| Outer Diameter                 | 48 mm    |
| d                              | 25 mm    |
| d1                             | 30 mm    |
| F                              | 30 mm    |
| D                              | 42 mm    |
| D1                             | 47 mm    |
| D2                             | 48 mm    |
| B                              | 20 mm    |
| C                              | 30 mm    |
| ra1 max.                       | 0,3 mm   |
| a                              | 42,7 mm  |
| r min.                         | 0,6 mm   |
| r1 min.                        | 0,3 mm   |
| C1                             | 11 mm    |
| da min.                        | 44 mm    |
| db min                         | 27 mm    |
| ra max.                        | 0,6 mm   |
| C2                             | 9,5 mm   |
| Weight                         | 0,202 Kg |
| Dynamic load rating radial (C) | 22,3 kN  |
| Dynamic load rating axial (C)  | 27,8 kN  |
| Static load rating radial (C0) | 39,5 kN  |



## NTN Bearing Driveshaft do Brasil

|                               |            |
|-------------------------------|------------|
| Static load rating axial (C0) | 72,5 kN    |
| (Grease) Lubrication Speed    | 1500 r/min |