



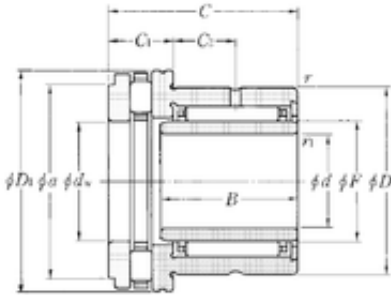

NTN Bearing Driveshaft do Brasil

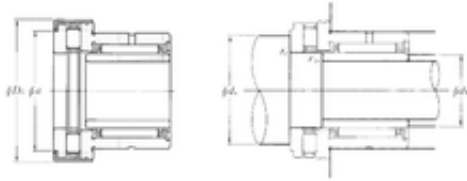

40 mm x 58 mm x 20 mm 40 mm x 58 mm x 20 mm NTN NKXR45T2Z+IR40 × 45 × 20 complex bearings

Bearing No. NKXR45T2Z+IR40 × 45 × 20

NKXR45T2Z+IR40 × 45 × 20 Bearing 2D drawings and 3D CAD models

Bore Diameter	40 mm
Outer Diameter	66,5 mm
d	40 mm
d1	45 mm
F	45 mm
D	58 mm
D1	65 mm
D2	66,5 mm
B	20 mm
C	32 mm
ra1 max.	0,3 mm
a	60,5 mm
r min.	0,6 mm
r1 min.	0,3 mm
C1	14 mm
da min.	61 mm
db min	42 mm
ra max.	0,6 mm
C2	9 mm
Weight	0,337 Kg
Dynamic load rating radial (C)	27,6 kN
Dynamic load rating axial (C)	45,5 kN
Static load rating radial (C0)	59 kN



NTN Bearing Driveshaft do Brasil

Static load rating axial (C0)	135 kN
(Grease) Lubrication Speed	1100 r/min