




## NTN Bearing Driveshaft do Brasil

### SKF 23076 CCK/W33 + OH 3076 H tapered roller bearings

Bearing No. 23076 CCK/W33 + OH 3076 H

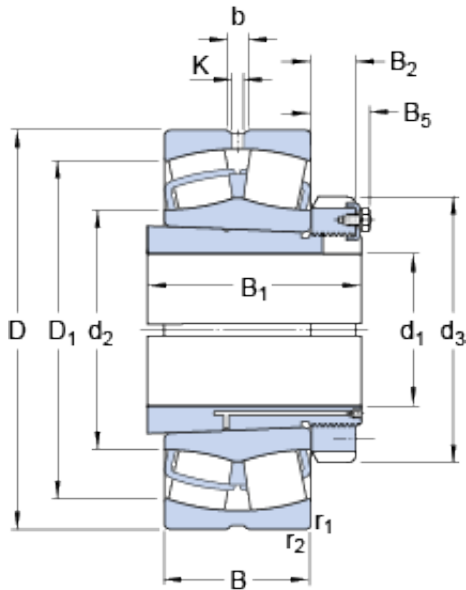

23076 CCK/W33 + OH 3076 H Bearing 2D drawings and 3D CAD models

Size	560x360x135 mm
Bore Diameter	560 mm
Outer Diameter	360 mm
Width	135 mm
$d_1$	360 mm
D	560 mm
B	135 mm
$d_2$	426 mm
$d_3$	450 mm
$D_1$	509 mm
$B_1$	193 mm
$B_2$	48 mm
$B_5$	62 mm
b	22.3 mm
K	12 mm
$r_{1,2}$ - min.	5 mm
$d_a$ - max.	426 mm
$d_b$ - min.	396 mm
$D_a$ - max.	542 mm
$B_a$ - min.	15 mm
$r_a$ - max.	4 mm
Basic dynamic load rating - C	2984 kN
Basic static load rating - $C_0$	5000 kN



## NTN Bearing Driveshaft do Brasil

Fatigue load limit - $P_u$	360 kN
Reference speed	900 r/min
Limiting speed	1200 r/min
Calculation factor - e	0.22
Calculation factor - $Y_1$	3
Calculation factor - $Y_2$	4.6
$d_1$	360 mm
$d_2$	426 mm
$d_3$	450 mm
$D_1$	509 mm
$B_1$	193 mm
$B_2$	48 mm
$B_5$	62 mm
$r_{1,2}$ min.	5 mm
$d_a$ max.	426 mm
$d_b$ min.	396 mm
$D_a$ max.	542 mm
$B_a$ min.	15 mm
$r_a$ max.	4 mm
Basic dynamic load rating C	2984 kN
Basic static load rating $C_0$	5000 kN
Fatigue load limit $P_u$	360 kN
Calculation factor e	0.22
Calculation factor $Y_1$	3
Calculation factor $Y_2$	4.6
Calculation factor $Y_0$	2.8
Mass bearing + sleeve	145 kg