




NTN Bearing Driveshaft do Brasil

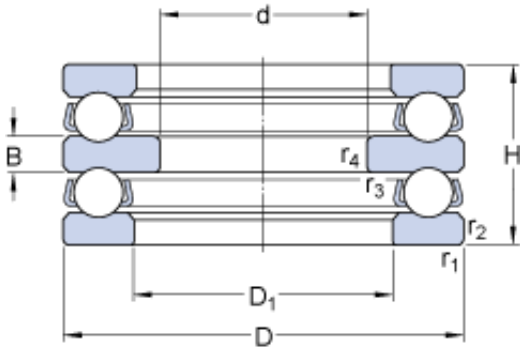

10 mm x 32 mm x 5 mm 10 mm x 32 mm x 5 mm SKF 52202 thrust ball bearings

Bearing No. 52202

52202 Bearing 2D drawings and 3D CAD models

| | |
|---|---------------------|
| Size | 32x10x22 mm |
| Bore Diameter | 32 mm |
| Outer Diameter | 10 mm |
| Width | 22 mm |
| d | 10 mm |
| D | 32 mm |
| H | 22 mm |
| D ₁ | 17 mm |
| B | 5 mm |
| r _{1,2} - min. | 0.6 mm |
| r _{3,4} - min. | 0.3 mm |
| d _a | 15 mm |
| D _a - max. | 22 mm |
| r _a - max. | 0.6 mm |
| r _b - max. | 0.3 mm |
| Basic dynamic load rating - C | 15.9 kN |
| Basic static load rating - C ₀ | 25 kN |
| Fatigue load limit - P _u | 0.915 kN |
| Reference speed | 5300 r/min |
| Limiting speed | 7500 r/min |
| Minimum load factor - A | 0.0038 |
| Category | Thrust Ball Bearing |
| Inventory | 0.0 |
| Manufacturer Name | SKF |
| | |



NTN Bearing Driveshaft do Brasil

| | |
|-------------------------------------|---|
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 0.085 |
| EAN | 7316577007094 |
| Product Group | B00308 |
| Rolling Element | Ball Bearing |
| Thrust Bearing | Yes |
| Single or Double Direction | Double Direction |
| Banded | No |
| Cage Material | Steel |
| Precision Class | ABEC 1 ISO P0 |
| Component Description | Roller Assembly Plus Raceways |
| Other Features | Double Row With Flat Seat |
| Long Description | 10MM Bore 1; 17MM Bore 2; 32MM Outside Diameter; 22MM Height; Ball Bearing; Double Direction; Not Banded; Steel Cage; ABEC 1 ISO P0 Precision |
| Inch - Metric | Metric |
| Category | Thrust Ball Bearings |
| UNSPSC | 31171552 |
| Harmonized Tariff Code | 8482.10.50.08 |
| Noun | Bearing |
| Keyword String | Ball Thrust |
| Manufacturer URL | http://www.skf.com |
| Manufacturer Item Number | 52202 |
| Weight / LBS | 0.17857 |
| Bore 2 | 0.669 Inch 17 Millimeter |
| Overall Height with Aligning Washer | 0 Inch 0 Millimeter |
| Bore 1 | 0.394 Inch 10 Millimeter |
| Outside Diameter | 1.26 Inch 32 Millimeter |
| Height | 0.866 Inch 22 Millimeter |
| | |



NTN Bearing Driveshaft do Brasil

| | |
|---|----------|
| D_1 | 17 mm |
| $r_{1,2}$ min. | 0.6 mm |
| $r_{3,4}$ min. | 0.3 mm |
| d_a | 15 mm |
| D_a max. | 22 mm |
| r_a max. | 0.6 mm |
| r_b max. | 0.3 mm |
| Basic dynamic load rating C | 15.9 kN |
| Basic static load rating C_0 | 25 kN |
| Fatigue load limit P_u | 0.915 kN |
| Minimum load factor A | 0.0038 |
| Mass bearing (including seat washer where applicable) | 0.081 kg |