




NTN Bearing Driveshaft do Brasil

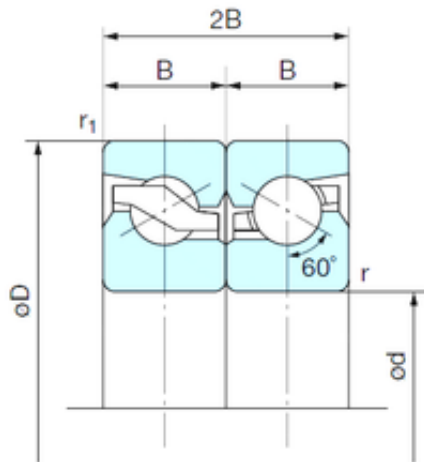

30 mm x 62 mm x 15 mm 30 mm x 62 mm x 15 mm NACHI 30TAB06DB thrust ball bearings

Bearing No. 30TAB06DB

30TAB06DB Bearing 2D drawings and 3D CAD models

Size	30x62x15 mm
Bore Diameter	30 mm
Outer Diameter	62 mm
Width	15 mm
d	30 mm
D	62 mm
B	15 mm
C	15 mm
Angle (°)	60 °
r min.	1 mm
r1 min.	0.6 mm
2B	30 mm
Weight	0.21 Kg
Basic dynamic load rating (C)	29,9 kN
Basic static load rating (C0)	46,4 kN
Bore Type	Cylindrical Bore
Enclosure	Open
Configuration	Double Row
Bore Size	30 mm
Outside Diameter	62 mm
Width	15 mm
Fillet Radius/Chamfer	1 mm
r1	0.6 mm
Starting Torque - Grease Lubrication	20 N · cm



NTN Bearing Driveshaft do Brasil

Dynamic Load Rating	29,900 N
Static Load Rating	46,400 N
Limiting Speed - Grease	4,650 rpm
Limiting Speed - Oil	6,000 rpm
da1 (min)	46.2 mm
da2 (min)	39.7 mm
Da1 (max)	46 mm
Da2 (max)	53.4 mm