




## NTN Bearing Driveshaft do Brasil

### Low Noise High Performance Deep Groove Ball Bearing NTN 6004llu

Bearing No. 6004llu

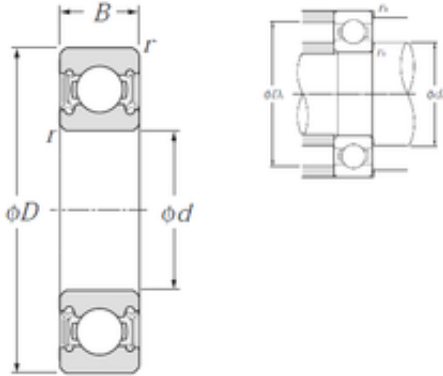

6004llu Bearing 2D drawings and 3D CAD models

Size	20x42x12 mm
Bore Diameter	20 mm
Outer Diameter	42 mm
Width	12 mm
d	20 mm
D	42 mm
B	12 mm
C	12 mm
r min.	0,6 mm
da min.	24 mm
da max	26 mm
Da max.	38 mm
ra max.	0,6 mm
Weight	0,069 Kg
Basic dynamic load rating (C)	9,4 kN
Basic static load rating (C0)	5,05 kN
Reference speed	11 000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.068
EAN	4547359003703
Product Group	B00308
Enclosure	2 Seals



## NTN Bearing Driveshaft do Brasil

Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	20MM Bore; 42MM Outside Diameter; 12MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Manufacturer Item Number	6004LLU/5C
Weight / LBS	0.151
Outside Diameter	1.654 Inch   42 Millimeter
Outer Race Width	0.472 Inch   12 Millimeter
Bore	0.787 Inch   20 Millimeter
Other Features	Deep Groove   Double Lip Friction Nitrile Rubber Seal   -20 To 120 Deg C   Shell Alvania Prelubricated
Inner Race Width	0 Inch   0 Millimeter
bore diameter:	20 mm
precision rating:	ISO Class 0



## NTN Bearing Driveshaft do Brasil

outside diameter:	42 mm
finish/coating:	Uncoated
overall width:	12 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	12 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	12 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	11000 rpm
internal clearance:	CN
fillet radius:	0.6 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	21000 RPM
dynamic load capacity:	9400 N
series:	60
static load capacity:	5050 N
manufacturer product page:	<a href="#">Click here</a>