




NTN Bearing Driveshaft do Brasil

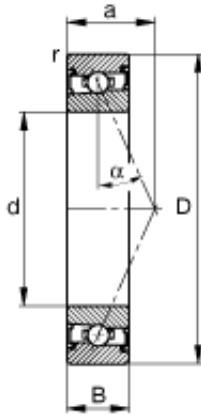

105 mm x 145 mm x 20 mm 105 mm x 145 mm x 20 mm FAG HSS71921-E-T-P4S angular contact ball bearings

Bearing No. HSS71921-E-T-P4S

HSS71921-E-T-P4S Bearing 2D drawings and 3D CAD models

Size	105x145x20 mm
Bore Diameter	105 mm
Outer Diameter	145 mm
Width	20 mm
d	105 mm
D	145 mm
B	20 mm
a	39 mm
D_a	138 mm / Tolerance: H12
d_a	112 mm / Tolerance: h12
$r_{a \max}$	0,6 mm
r_{\min}	1,1 mm
	25 ° / Angle
m	0,87 kg / Weight
C_r	27500 N / Dynamic load rating (radial)
C_{Or}	23400 N / Static load rating (radial)
$n_{G \text{ Fett}}$	11000 1/min / Limiting speed for grease lubrication
Size	105x145x20 mm
Bore Diameter	105 mm
Outer Diameter	145 mm
Width	20 mm
d	105 mm



NTN Bearing Driveshaft do Brasil

D	145 mm
B	20 mm
C	20 mm
Angle ()	25 °
a	39 mm
r min.	1,1 mm
Da	138 mm
ra max.	0,6 mm
da	112 mm
Weight	0,87 Kg
Basic dynamic load rating (C)	28 000 kN
Basic static load rating (C0)	35 500 kN
(Grease) Lubrication Speed	9 000 r/min