




NTN Bearing Driveshaft do Brasil

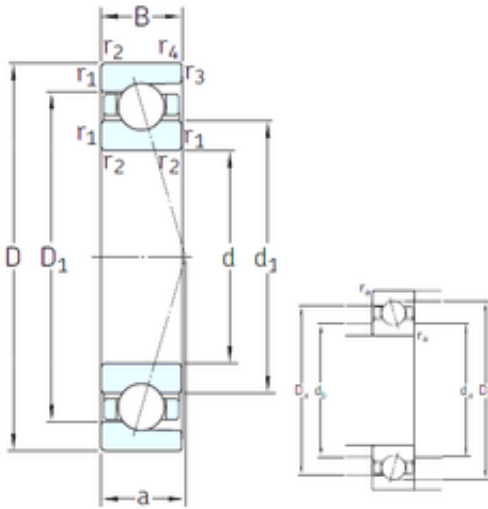

10 mm x 19 mm x 5 mm 10 mm x 19 mm x 5 mm SNFA SEA10 /NS 7CE1 angular contact ball bearings

Bearing No. SEA10 /NS 7CE1

SEA10 /NS 7CE1 Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|------------|
| Size | 10x19x5 mm |
| Bore Diameter | 10 mm |
| Outer Diameter | 19 mm |
| Width | 5 mm |
| d | 10 mm |
| D | 19 mm |
| B | 5 mm |
| C | 5 mm |
| a | 4,5 mm |
| d1 | 13,1 mm |
| r1 min. | 0,3 mm |
| r2 min. | 0,3 mm |
| r3 min. | 0,15 mm |
| r4 min. | 0,15 mm |
| D1 | 16,1 mm |
| da min. | 12 mm |
| Da max. | 17 mm |
| db min | 12 mm |
| ra max. | 0,3 mm |
| rb max. | 0,15 mm |
| Db max | 18,2 mm |
| Weight | 0,005 Kg |
| Basic dynamic load rating (C) | 1,9 kN |
| Basic static load rating (C0) | 0,98 kN |



NTN Bearing Driveshaft do Brasil

| | |
|----------------------------|---------------|
| (Grease) Lubrication Speed | 95 000 r/min |
| (Oil) Lubrication Speed | 150 000 r/min |
| Fatigue load limit (Pu) | 0,043 |